


MEDIA FILTRATION CM-18

- Flow rates up to 25 GPM

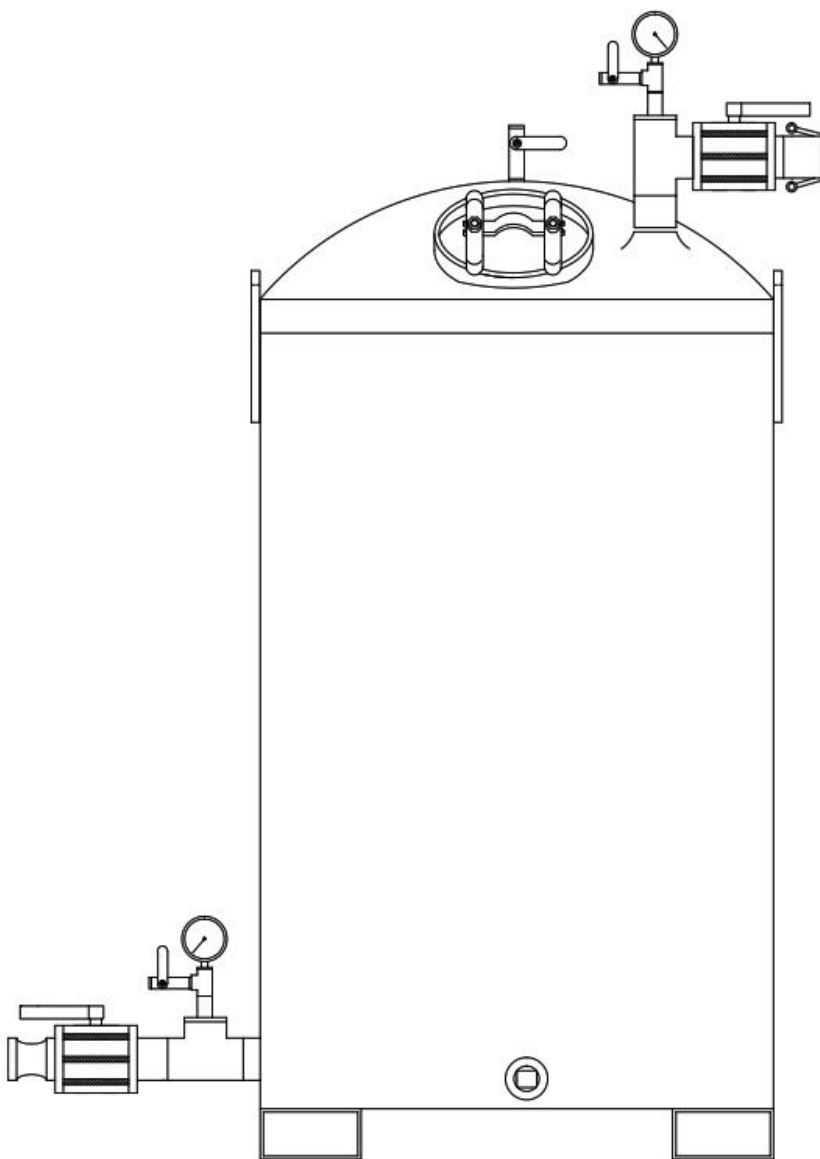

FEATURES

- Durable carbon steel construction
- Epoxy lined interior.
- Hydrotested to 90 PSI for a maximum operating pressure of 75 PSI.
- Lifting lugs and forklift guides to facilitate moving and placement.
- Lower PVC collection hub and laterals positioned for maximum media utilization.
- Upper PVC distribution hub and laterals allow for backwashing or upflow operation.
- 2" Influent/effluent quick coupler connections.

TECHNICAL

- 500 lbs. GAC media capacity
- 1,000 lbs. Organoclay media capacity
- 12" x 16" elliptical manway for easy access.
- 450 lbs. equipment weight.
- 25 GPM flow rate.
- 18 cubic foot media capacity.
- 5'2" Height
- 2" inlet/outlet quick coupler connections.



Clear Creek Systems

Nationwide Service
CA • MD • OR • WA
Phone • 877 324 9634
sales@clearcreeksystems.com
www.clearcreeksystems.com