


OIL WATER SEPARATION

OWS-200

- Meets API 421 Specifications
- Flow rates up to 200 GPM

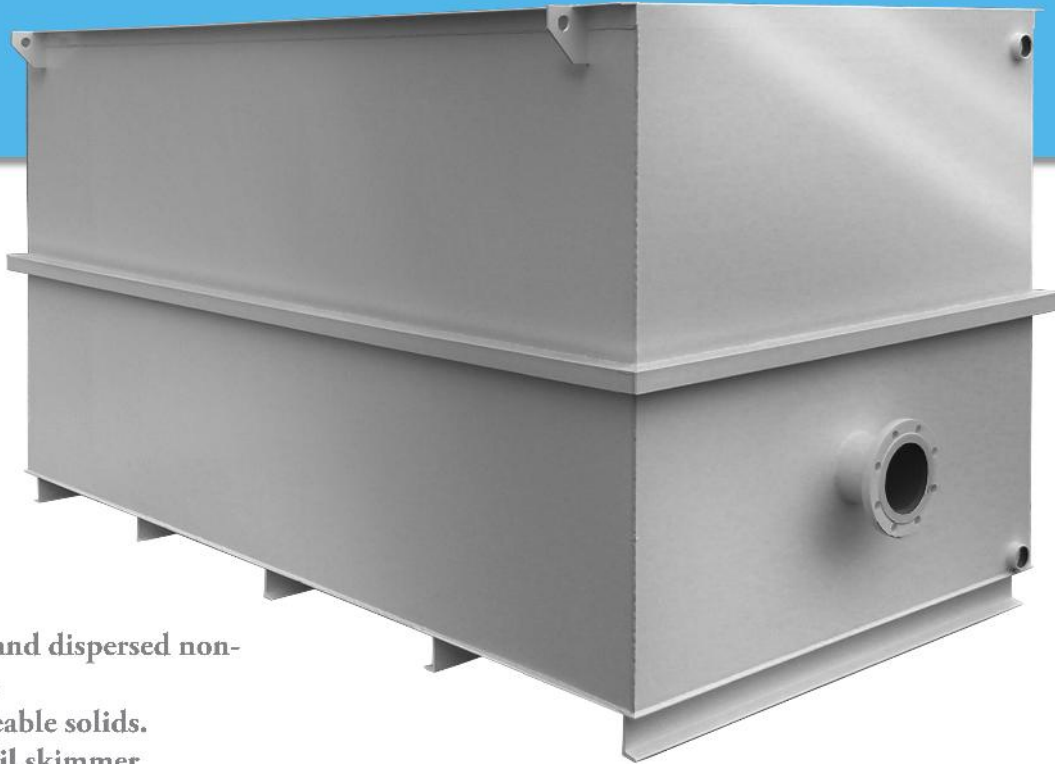

FEATURES

- Removes free and dispersed non-emulsified oil.
- Removes settleable solids.
- Gravity flow oil skimmer
- Easy cleaning via removable vapor tight cover and bottom drains.
- No moving parts.
- No power required.
- Trailer or skid mounted unit.

TECHNICAL

- Parallel corrugated plate gravity displacement type separator.
- Designed in accordance with API 421 to remove any dispersed non-emulsified oil and settleable solids.
- Skid length, width, height: 128" x 86" x 44"
- 4,200 lbs. shipping weight.
- 12,000 lbs. weight full.

MATERIAL SPECIFICATIONS

- Chambers constructed out of steel.
- Coalescing pack is polypropylene with 1/2" media standard.
- 6" flange inlet and outlet, #150.
- 3" sludge drain flange, #150.
- 3" oil drain flange, #150.



Clear Creek Systems

Nationwide Service
CA • MD • OR • WA
Phone • 877 324 9634
sales@clearcreeksystems.com
www.clearcreeksystems.com